



**EURO
SEATING**

No limits to inspiration

www.euroseating.com

KING GOLD RECLINER R5

With headrest

TECHNICAL SPECIFICATIONS

Recliner seat with motorized electric footrest.

Dimensions: 68 cm seat centres
89 - 138 cm depth
107 - 112 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Different options of backrest drawing. Rocker system integrated. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Electrical motor included. Polyurethane density 65 Kg/m³

Side panel: Wood structure completely upholstered. Concealed floor fixation system. Possibility of adding cupholder and table.

Volume: 0.210 m³ / unit

Weight: 60 Kg




Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

KING GOLD RECLINER R5

With headrest

DRAWING

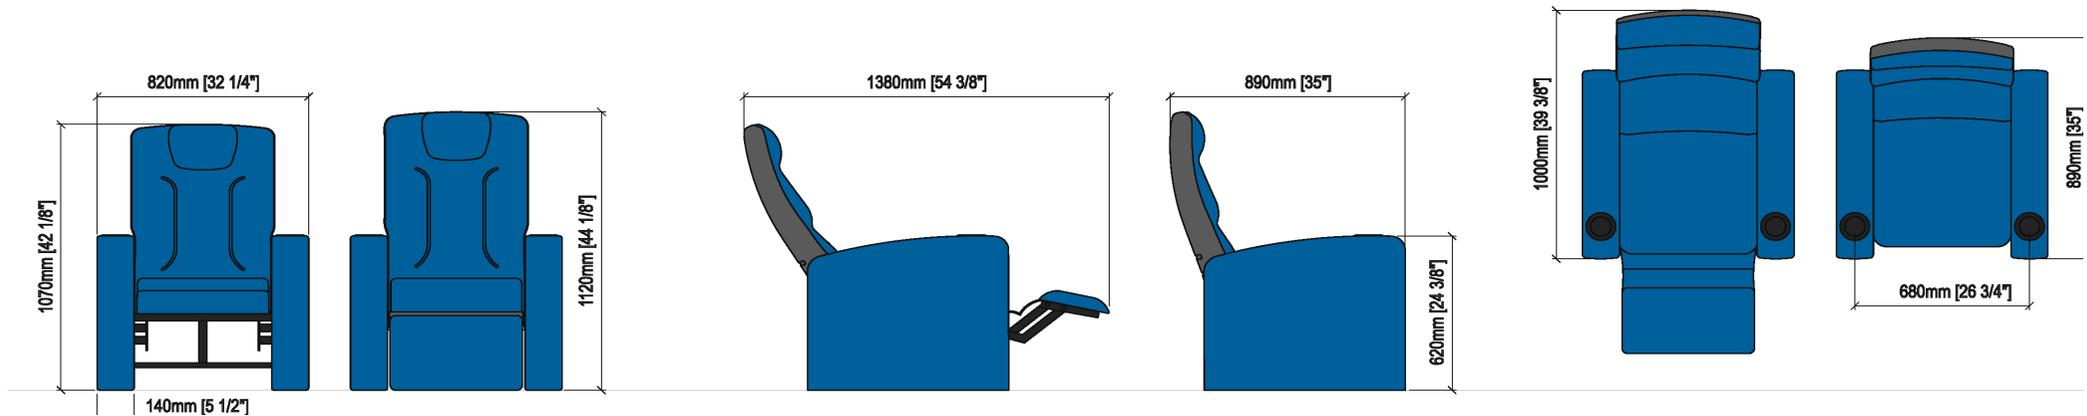

OPTIONS



Embroidered logo



Row labels



Seating numbering

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Part 1

	Fabrics	Fire barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Part 1		•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.